


## Cell Type : IMR26650-C

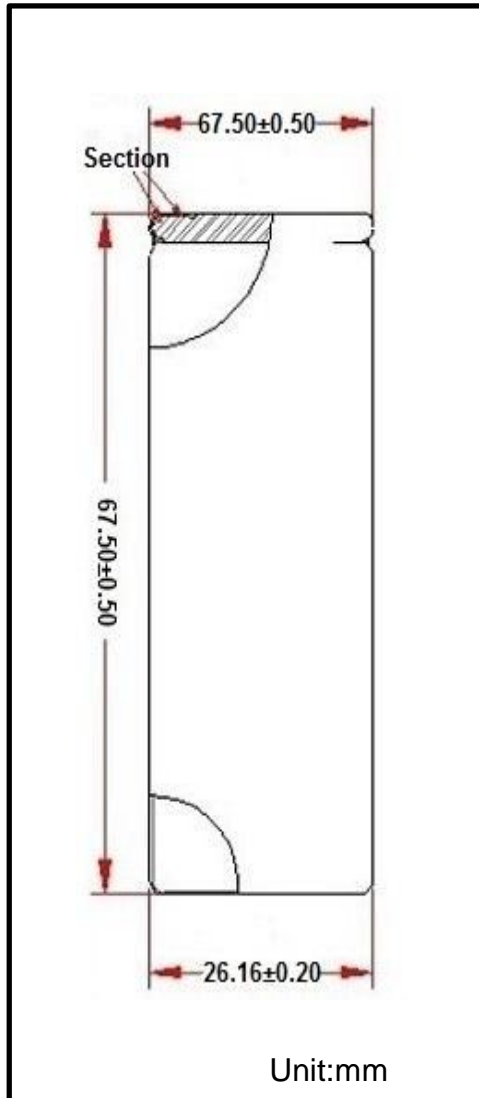

### Specification


Typical Capacity:	Typ.5200mAh	
Nominal Capacity:	Min.5100mAh	
Nominal Voltage:	3.7V	
Standard Charging :	CC-CV, 1A, 4.2V±0.05, 50mA cut-off	
Rapid Charging :	CC-CV, 2A, 4.2V±0.05, 50mA cut-off	
Charging Time:	Standard Charging:6 hours/50mA cut-off	
	Rapid Charging:3 hours/50mA cut-off	
Max.Discharge Current:	20A	
Max.Pulse Discharge:	30A	
Discharge cut-off voltage:	2.5V	
Initial Internal Impedance	Max.32mΩ	
Cell weight:	93.5±1g	
Ambient Temperature	Charge	-10~45℃
	Discharge	-20~60℃
	Storage	-20~35℃
Cell Dimensions	Height	67.50±0.50 mm
	Diameter	26.24±0.20 mm

**IMR26650-C 5200mAh Rate discharge capability**

Ambient Temperature: 23°C

Test method: Charge CC-CV 5A 4.2V 50mA Cut-off

Discharge CC 0.2C/5A/10A/15A/20A 2.5V Cut-off

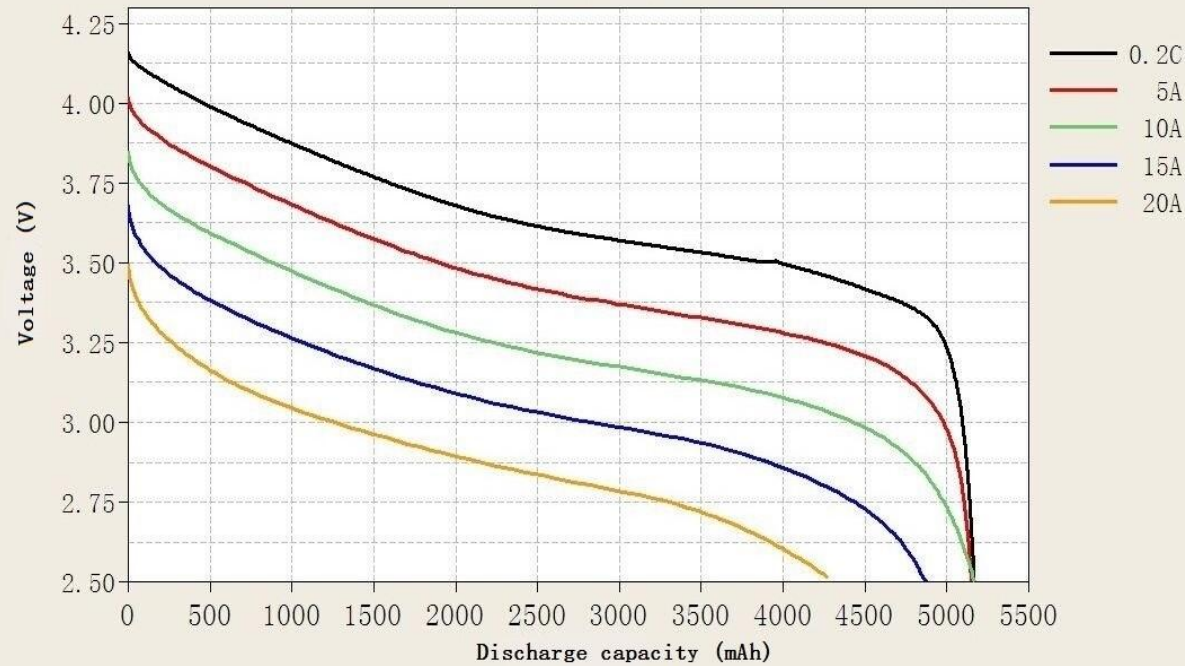

Current(A)	Capacity(mAh)
<b>0.2C</b>	<b>≥5200</b>
<b>1C</b>	<b>≥4900</b>
<b>10A</b>	<b>≥4800</b>
<b>15A</b>	<b>≥4500</b>
<b>20A</b>	<b>≥4000</b>